


# Cylinder Heads



## COMPLETE ALUMINUM CYLINDER HEADS


- 7° Locks & Retainers
- 3/8" Screw-in Studs
- 5/16" Stepped Guideplates
- Spring height adjusted & set professionally
- Valve guides cleaned, inspected & gel lubed
- Umbrella Valve Seals installed
- Handles up to .600" lift @ 1.800"

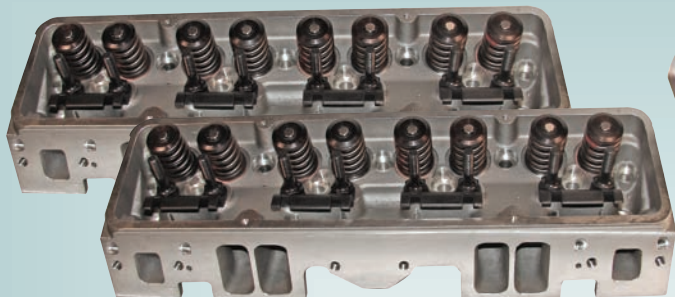

## BARE ALUMINUM CYLINDER HEADS

- High Grade Aluminum
- 64cc Chamber
- 190cc Intake Runner
- Hardened Seats
- Bronze Valve Guides

PART NO.	STYLE	PLUG	CHAMBER/RUN	MAX LIFT	CAM SPEC	SPRINGS	VALVE SIZE
<b>SB CHEVY</b>							
171000	Bare	Angle	64/210cc	Bare	Bare	Bare	1.60 / 2.02-2.08
171000A	Complete	Angle	64/210cc	.550"	Hydraulic	920-16	1.60 / 2.02
171000AS	Complete	Angle	64/210cc	.600"	Solid / Hyd Roller	927-16	1.60 / 2.02
171500	Bare	Straight	64/210cc	Bare	Bare	Bare	1.60 / 2.02-2.08
171500A	Complete	Straight	64/210cc	.550"	Hydraulic	920-16	1.60 / 2.02
171500AS	Complete	Straight	64/210cc	.600"	Solid / Hyd Roller	927-16	1.60 / 2.02
<b>BB CHEVY</b>							
170000	Bare	Std.	115/320cc	Bare	Bare	Bare	1.88 / 2.19
<b>SB FORD</b>							
172000	Bare	Std.	60/190cc	Bare	Bare	Bare	1.60 / 2.02-2.08
172000A	Complete	Std.	60/190cc	.550"	Hydraulic	920-16	1.60 / 2.02
172000AS	Complete	Std.	60/190cc	.600"	Solid / Hyd Roll	927-16	1.60 / 2.02

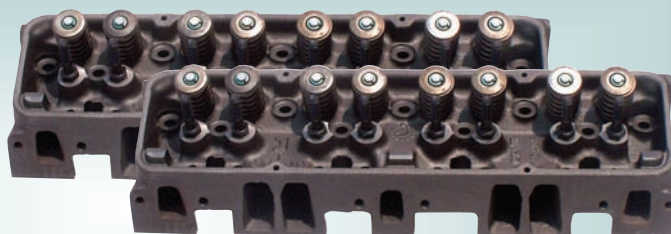

## CAST IRON CYLINDER HEADS

PART NO.	MAKE	MATERIAL	STYLE	PLUG	CHAMBER	CAM SPEC	SPRING	VALVES
17106	SB Chevy	Iron - reman	Complete	Straight	65cc	Hydraulic	900-16	1.60 / 2.02
161000	SB Chevy	Iron - new	Complete	Angle	64cc	Hydraulic	900-16	1.50 / 1.94
173000	SB Chrysler	Iron - new	Bare	Std	OEM	n/a	n/a	1.62 / 1.92